




J1: ECU MAIN CONNECTOR
 PACKARD 1211 0490
 PIN: 1208 4912

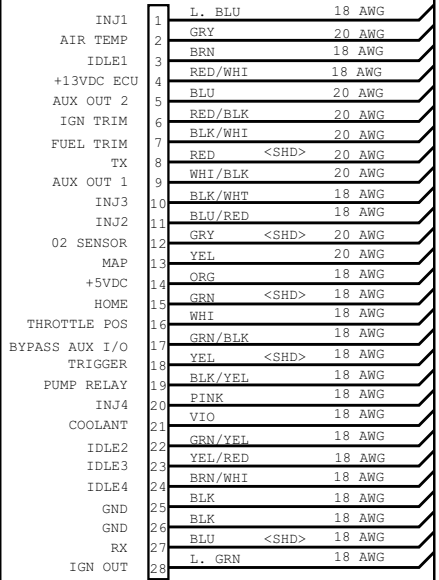


J2: PC INTERFACE
 9 PIN D - FEMALE




J14: TRIM
 PACKARD 1201 0717
 PIN: 1212 4580L




J15: SPARE A/D
 PACKARD 1201 0717
 PIN: 1212 4580L





J3: FUSE BLOCK CONNECTOR
 PACKARD 1203 4342
 PIN: 1212 4582L



J4: POWER RELAY
 AMP 926526
 PIN: 341001-3



J5: PUMP RELAY
 AMP 926526
 PIN: 341001-3




NOTES:


1. MAIN WIRE COLOUR LISTED FIRST
 E.G. RED/GRN INDICATES RED WIRE WITH GREEN STRIPE
2. USE V-90 HT PVC INSULATION.
3. WIRE SIZES AS FOLLOWS (OR NEAREST EQUIVALENT):

AWG	AREA (sq.mm)	SUGG. STRANDING #COND / DIA(mm)
24	0.25	7/0.20
20	0.5	10/0.25
18	1.0	16/0.30
16	1.5	30/0.25
13	2.5	50/0.25
4. THE NEGATIVE SIDE OF THE FUEL PUMP SHOULD BE CONNECTED DIRECTLY TO GROUND.


J8: MAP SENSOR
 PACKARD 1202 0403
 PIN: 1212 4582L




J16: TRIGGER INPUT
 PACKARD 1205 2848
 PIN: 1204 8074




J6: O2 SENSOR
 PACKARD 1201 0717
 PIN: 1212 4582L



J13: INJECTOR HARNESS
 PACKARD 1204 7938
 PIN: 1204 8074

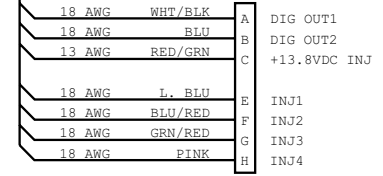


J10: THROTTLE POSITION
 PACKARD 1201 5793
 PIN: 1212 4582L




J11: AIR TEMP SENSOR
 PACKARD 1216 2197
 PIN: 1210 3881L




J12: COOLANT SENSOR
 PACKARD 1216 2193
 PIN: 1210 3881L



J9: IDLE SPEED MOTOR
 PACKARD 1201 5798
 PIN: 1212 4580L



J7: IGNITION OUTPUT
 PACKARD 1202 0786
 PIN: 1212 4580L

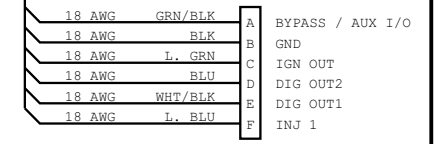

E6 MAIN HARNESS ELECTRICAL	
HALTECH, SYDNEY AUSTRALIA	
DATE: 1ST DECEMBER 2001	
REV C	SHEET 1 OF 1