




**J1: ECU MAIN CONNECTOR**  
 PACKARD 1211 0490  
 PIN: 1208 4912

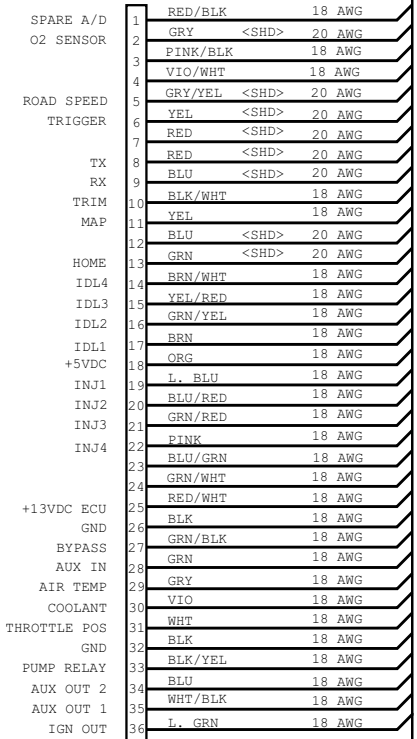


**J3: FUSE BLOCK CONNECTOR**  
 PACKARD 1203 4342  
 PIN: 1212 4582L




**J4: POWER RELAY**  
 AMP 926526  
 PIN: 341001-3




**J5: PUMP RELAY**  
 AMP 926526  
 PIN: 341001-3




**J2: PC INTERFACE**  
 9 PIN D - FEMALE




**J14: TRIM**  
 PACKARD 1201 0717  
 PIN: 1212 4580L




**J15: SPARE A/D**  
 PACKARD 1201 0717  
 PIN: 1212 4580L




**J8: MAP SENSOR**  
 PACKARD 1202 0403  
 PIN: 1212 4582L




**J16: TRIGGER INPUT**  
 PACKARD 1205 2848  
 PIN: 1204 8074




**J17: ROAD SPEED**  
 PACKARD 1211 0293  
 PIN: 1204 8074




**J6: O2 SENSOR**  
 PACKARD 1201 0717  
 PIN: 1212 4582L




**J13: INJECTOR HARNESS**  
 PACKARD 1204 7938  
 PIN: 1204 8074

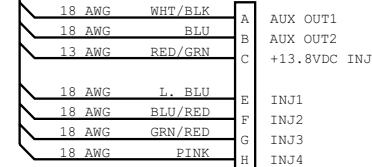


**J10: THROTTLE POSITION**  
 PACKARD 1201 5793  
 PIN: 1212 4582L




**J11: AIR TEMP SENSOR**  
 PACKARD 1216 2197  
 PIN: 1210 3881L




**J12: COOLANT SENSOR**  
 PACKARD 1216 2193  
 PIN: 1210 3881L



**J9: IDLE SPEED MOTOR**  
 PACKARD 1201 5798  
 PIN: 1212 4580L



**J7: IGNITION OUTPUT**  
 PACKARD 1202 0786  
 PIN: 1212 4580L

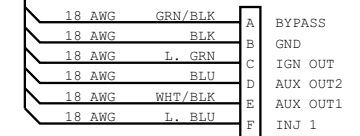

**NOTES:**

1. MAIN WIRE COLOUR LISTED FIRST  
 E.G. RED/GRN INDICATES RED WIRE WITH GREEN STRIPE
2. USE V-90 HT PVC INSULATION.
3. WIRE SIZES AS FOLLOWS (OR NEAREST EQUIVALENT):
 

AWG	AREA (sq.mm)	SUGG. STRANDING #COND / DIA(mm)
24	0.25	7/0.20
20	0.5	10/0.25
18	1.0	16/0.30
16	1.5	30/0.25
13	2.5	50/0.25
4. THE NEGATIVE SIDE OF THE FUEL PUMP SHOULD BE CONNECTED DIRECTLY TO GROUND.

<b>E6S MAIN HARNESS ELECTRICAL</b>	
HALTECH, SYDNEY AUSTRALIA	
DATE: 1ST FEBRUARY 2001	
REV B	SHEET 1 OF 1